All-New

superTube®

The Next Generation of Tube Heaters



High-efficiency ECM Motor

- 85% motor efficiency
- Automatically adjusts airflow to variable site conditions
- True modulating adjustment of both air and gas
- Whisper quiet operation



Optimized Reflector

- Increased efficiency over conventional reflector
- Optimized heat distribution throughout entire radiant area
- More uniform comfort
- Less BTUHs needed to meet building heat loss



Now Up To 260,000 BTUH


- Models range from 50,000 to 260,000 BTUHs
- Higher mounting heights possible for more applications
- More heat = less heaters
 = lower install costs and less
 energy used

Factory Installed Turbulator


Lowers installation costs

Technical Specifications

Clearance to Combustibles

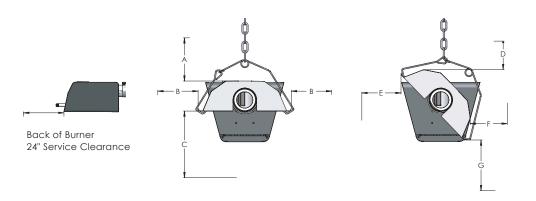

Dimensions	and	Specifications
	_	

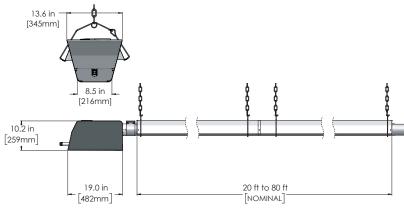

	Suspended Horizontally				
Model	Α	В	С		
SST 260	13.5"	51"	78"		
SST 225	13.5"	51"	78''		
SST 205	13"	50"	78''		
SST 180	13"	45"	76"		
SST 155	12"	40''	73"		
SST 130	11"	36"	70''		
SST 115	11"	34"	66"		
SST 80	10"	30"	62"		
SST 65	10"	28''	55"		
SST 50	10"	24"	47''		

Suspended	d at an an	gle up to 45	ρΫ́
D	Е	F	G
13.5"	80''	16"	75"
13.5"	80''	16"	75"
13"	78''	16"	72"
12"	76''	16"	70''
11"	70''	16"	67''
11"	67''	16"	63''
10''	63''	16"	60''
10''	60''	16"	55"
10''	50''	16''	50''
10''	42''	16"	34"

Tube Lengths – Available in Single-Stage [•] or Modulating[■]						
20'	30'	40'	50'	60'	70'	80'
				• ■	• ■	•
				•	•	•
			• ■	• ■	•	
			•	•	•	
		• ■	• ■	•		
	•	•	•			
	•	• ■	•			
•	•	•				
•	•	•				
•	•	•				



Information provided is intended only as a reference and should not be used when installing equipment. Please ensure you locate the most recent instruction manual for accurate and up to date information.



USA: 2 Schwank Way, Waynesboro, GA 30830 **Canada:** 5285 Bradco Blvd. Mississauga, ON L4W 2A6 **Tel:** 1-877-446-3727 **Fax:** 1-866-361-0523

csr@schwankgroup.com www.schwankgroup.com