

superTube SST Series

Performance and efficiency reinvented

The latest advancement in infrared radiant heating—built with EC Motor (ECM) technology, advanced whisper-quiet operation, and true modulation models. Available in NG/LP modulating, single-stage, and two-stage models.




→ Features

- BTUh Input range: 50,000-250,000 BTU/h
- Lengths: 20-80 ft
- Highest mounting options up to 50ft
- Fuel: Natural Gas or Propane
- Certification: UL
- Warranty: 10-year burner, 10-year tubes, 3-year components

→ **Dimensions and specifications**

With a wide range of sizes and models available, choose the ideal superTube to use in your commercial or industrial space.

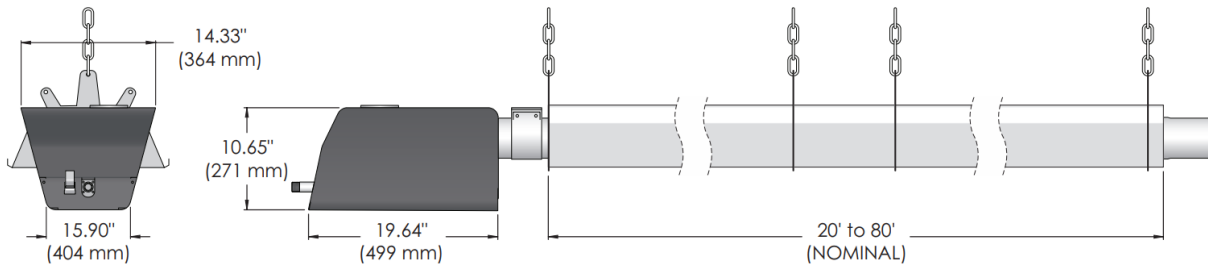

Model	20'	30'	40'	50'	60'	70'	80'	Legend
250					■ ■ ■ ■	■ ■ ■ ■	■	■ Single-Stage ■ Two-Stage ■ Modulating
225					■ ■	■ ■	■	
205				■ ■ ■ ■	■ ■ ■ ■	■		
180				■ ■	■ ■	■		
155			■ ■ ■ ■	■ ■ ■ ■	■			
130		■ ■	■ ■	■				
115		■ ■ ■ ■	■ ■ ■ ■	■				
80	■ ■ ■ ■	■ ■ ■ ■	■					
65	■ ■	■ ■	■					
50	■ ■	■ ■	■					

→ **Clearance to combustibles**

Model Input Rate (BTUH)	Suspended horizontally				Suspended at an angle up to 45 degrees		
	A	B	C	D	E	F	G
250,000	12"	44"	95"	14"	6"	78"	82"
225,000	12"	42"	92"	12"	6"	78"	78"
205,000	8"	40"	88"	10"	6"	78"	74"
180,000	7"	36"	84"	8"	4"	76"	72"
155,000	6"	30"	80"	7"	4"	74"	66"
130,000	6"	28"	78"	7"	3"	72"	64"
115,000	5"	26"	74"	5"	3"	70"	62"
80,000	5"	24"	62"	5"	3"	60"	54"
65,000	4"	22"	52"	4"	3"	50"	48"
50,000	4"	20"	42"	4"	3"	44"	40"

